






Product Features

1. Adopting integral moulding forging process, it has high density, high structural strength, high purity of aluminium, fast heat conduction, large heat dissipation area and good heat dissipation effect.
2. Surface applied electrophoresis tech, strong corrosion resistance
3. With a variety of light distribution modes, 60 /90 / optical lens, to meet the needs of professional light distribution
4. Optional fog silver high purity aluminium reflector, simple appearance, strong and reliable structure, with anti-glare function
5. IP rating: IP65

Application

Widely used on lighting of factory,warehouse,stadium,bus - station,shopping mall,exhibition hall and so on.

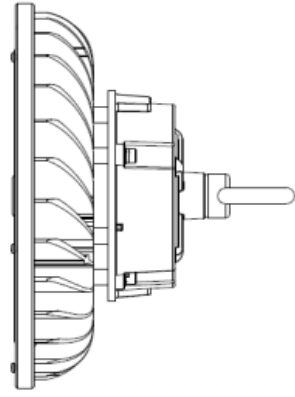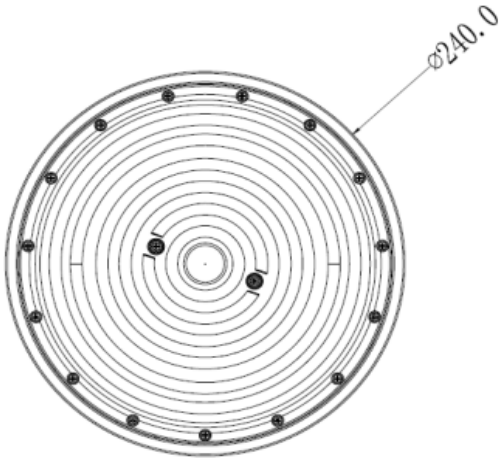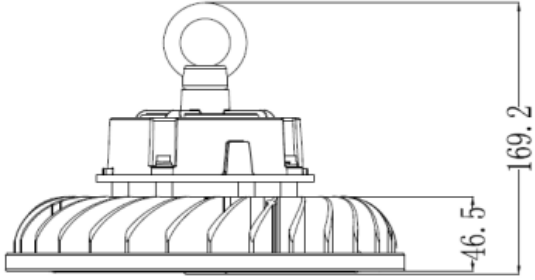


Lens Parameter


It has a variety of light distribution modes to meet the needs of professional light distribution (60 degree lens, 90 degree lens and optical lens can be selected); 2835 light source is standard.




Optional Lens

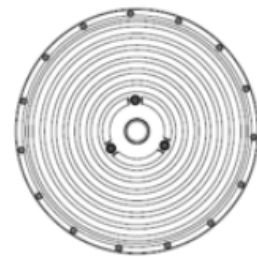

60°透镜

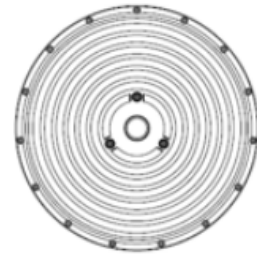

90°透镜

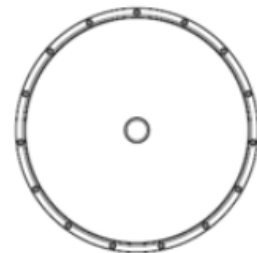

光面透镜